

SWR-100 THE VALUE WAX-RESIN BY SATO

APPLICATIONS



Healthcare



Horticulture



Pharmaceutical



Produce



Retail



Transportation



Warehouse

FEATURES

Low printhead energy

Abrasion resistance

Print flexibility

High density print

Chemical resistance to common agents


Anti-static printhead saver coating for printhead protection

TECHNICAL INFORMATION

SWR-100

RIBBON PROPERTIES

Ink	Wax Resin
Colour	Black
Thickness	<9.0µm
Carrier	4.5µm Polyester Film
Ink Melting Point	80°C
Optical Density (transmission)	>1.00
Optical Density (reflective)	>1.70
Maximum Print Speed	300mm/s

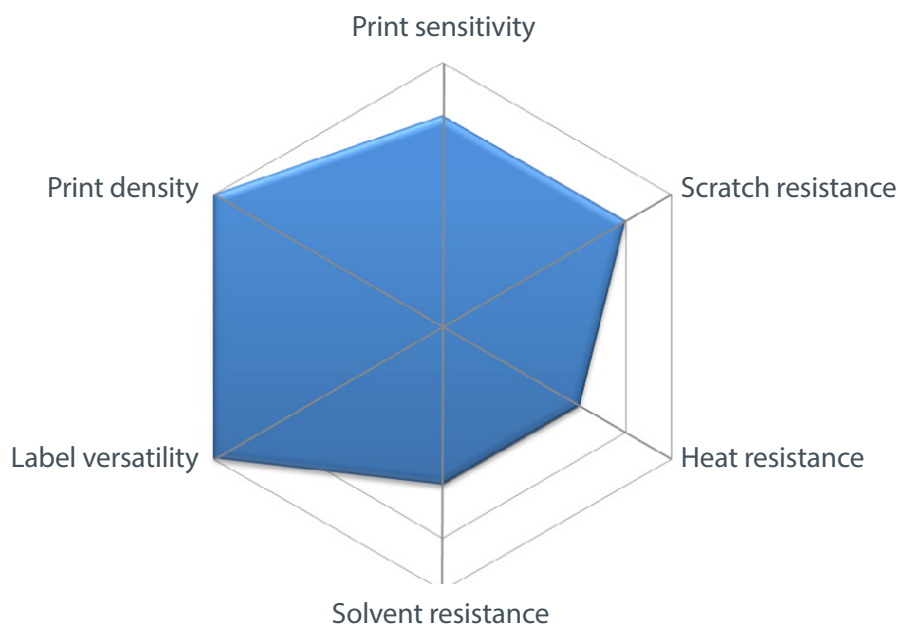

PRINTING SUBSTRATES

Papers	Uncoated, Coated, Card
Synthetics	Polyester, Polyethylene, Polypropylene, PVC