

SWX-100 THE VALUE PREMIUM WAX BY SATO ENHANCED WAX

APPLICATIONS



Healthcare



Horticulture



Pharmaceutical



Produce



Retail



Transportation



Warehouse

FEATURES

Low printhead energy

Abrasion resistance

Print flexibility

High density print


Anti-static printhead saver coating for printhead protection

TECHNICAL INFORMATION

SWX-100

RIBBON PROPERTIES

Ink	Wax
Colour	Black
Thickness	<8.0µm
Carrier	4.5µm Polyester Film
Ink Melting Point	70°C
Optical Density (transmission)	>1.30
Optical Density (reflective)	>1.90
Maximum Print Speed	300mm/s

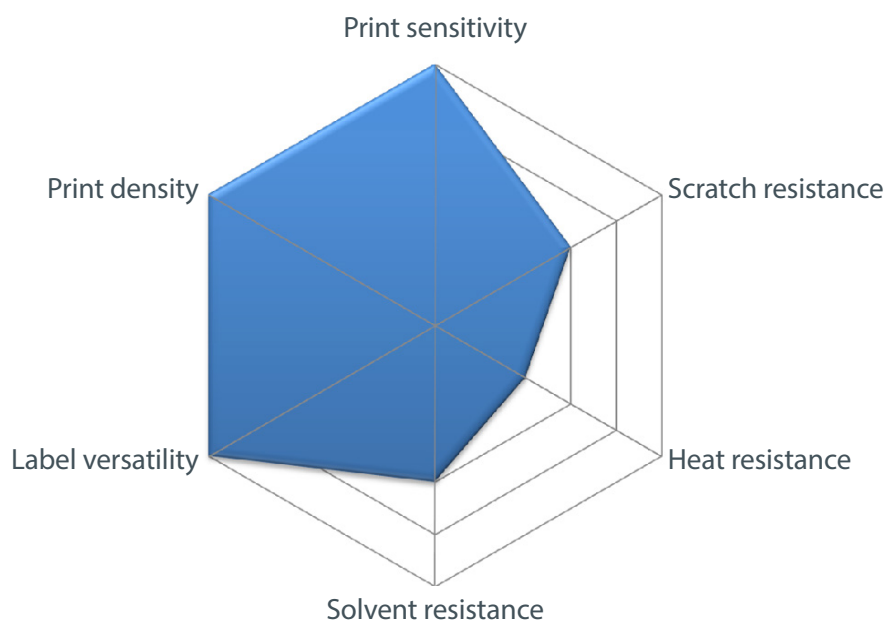

PRINTING SUBSTRATES

Paper	Coated
Synthetics	Polyester, Polyethylene, Polypropylene, PVC