


CBL-020-300-C00


Cable for product : Generic HSM – bar code scanner
Description: Standard Serial RS232 DB9 Female coiled
Interface: RS232 TTL (5V)
Connector A: Molded 10 Pin Modular (RJ50 like)
Connector B: Molded DB9 - Female
Connector C: STD HSM Power link 5V (DC Jack with shunt)

Cable length: 2.80 meter (retracted ~1.35 m)
Max extended

Pin assignment

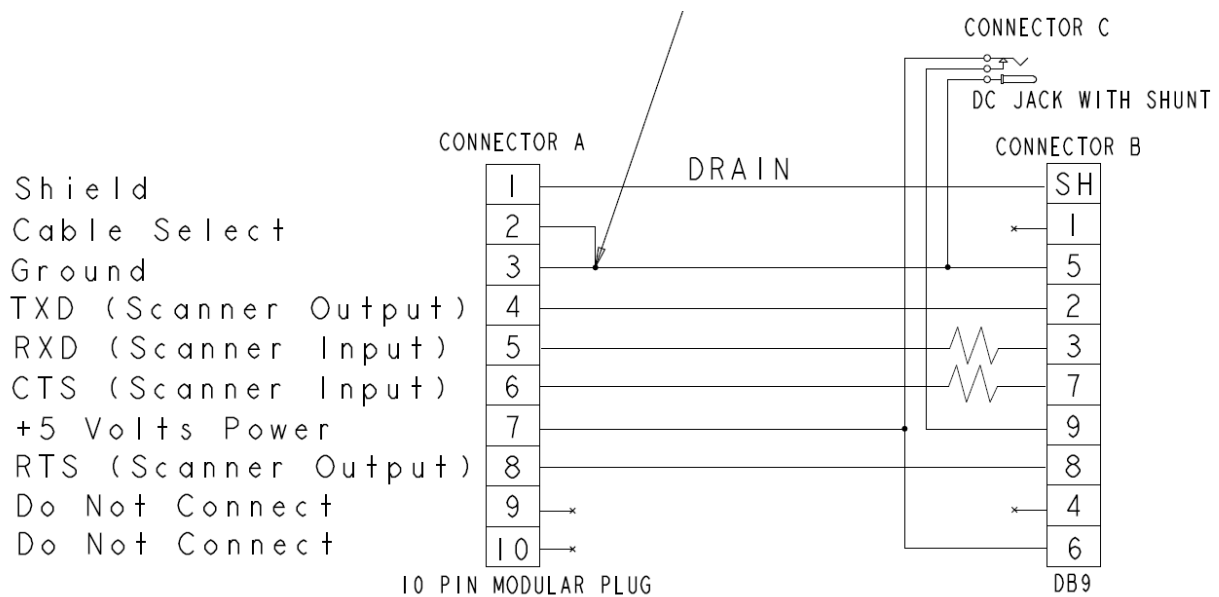

Connector assignment

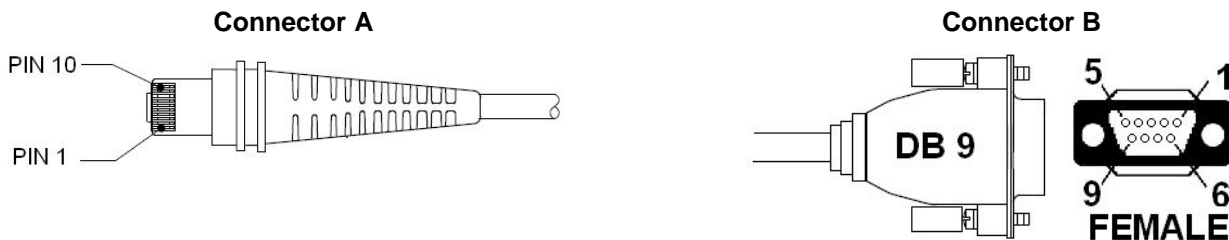

NOTE:

- WARNING:** connecting to 12V host powered systems with these cables will damage the 5V-only scanner when the External Power (PSU) is disconnected from con. C.

Under no circumstances will Honeywell International Inc. be liable to any person or business entity for any direct, indirect, special, incidental, consequential or other damages based on any use of the information in this document or any other linked or referenced document, including, without limitation, any lost profits, business interruption, or loss of programs or information, even if Honeywell International Inc. has been specifically advised of the possibility of such damages.